

# Product Presentation & Model# BEF-50-72BIF04



- ◆ Voltage: 120V 60Hz
  - ◆ Heater (Watts): 750W/1500W
  - ◆ Product size (L x W x H): **See next slide**
  - ◆ 50"-72" Slim Wall mounted /Recessed electric fireplace
  - ◆ Both used as wall mounted and wall recessed
  - ◆ Two levels heating functions low 750W, high 1500W
  - ◆ Five levels flame brightness adjustment
  - ◆ Temperature setting from 18-30°C
  - ◆ Electric Timer from 0.5-8 hours
  - ◆ Both operated with remote control & **Touch on panel**
  - ◆ With **six** colors multiple LED lights for flame effect
  - ◆ Multiple 10 colors LED ember lights
  - ◆ Logset, Pebbles or Crystals ember decoration
  - ◆ Wall bracket is included
- ◆ Packing method: Neutral packing



Heater



Timer



Remote control



Fan



LED light




Control panel


# Product Presentation & Model# BEF-50-72BIF04

## Product Dimensions

Model Number	A	B	C	D	E	F	G	H
BEF-42BIF04	41-3/4" 1060mm	17" 430mm	5-3/4" 146mm	40-7/16" 1027mm	15-5/8" 397mm	5-5/8" 143mm	38" 965mm	12" 306mm
BEF-50BIF04	49-3/4" 1262mm	17" 430mm	5-3/4" 146mm	48-7/16" 1230mm	15-5/8" 397mm	5-5/8" 143mm	46" 1168mm	12" 306mm
BEF-60BIF04	59-3/4" 1516mm	17" 430mm	5-3/4" 146mm	58-7/16" 1484mm	15-5/8" 397mm	5-5/8" 143mm	56" 1422mm	12" 306mm
BEF-65BIF04	64-3/4" 1643mm	17" 430mm	5-3/4" 146mm	63-7/16" 1611mm	15-5/8" 397mm	5-5/8" 143mm	61" 1548mm	12" 306mm
BEF-72BIF04	71-3/4" 1821mm	17" 430mm	5-3/4" 146mm	70-7/16" 1789mm	15-5/8" 397mm	5-5/8" 143mm	68" 1727mm	12" 306mm

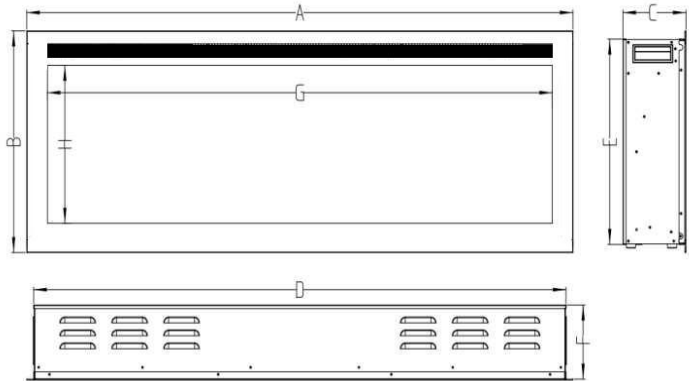

Description	Electric Fireplace
Type	2 Way Mounting Unit Wall-Mount, Recess into Wall
Voltage	120V AC
Watts	MAX 1500W
Amps	15 AMP Grounded Circuit

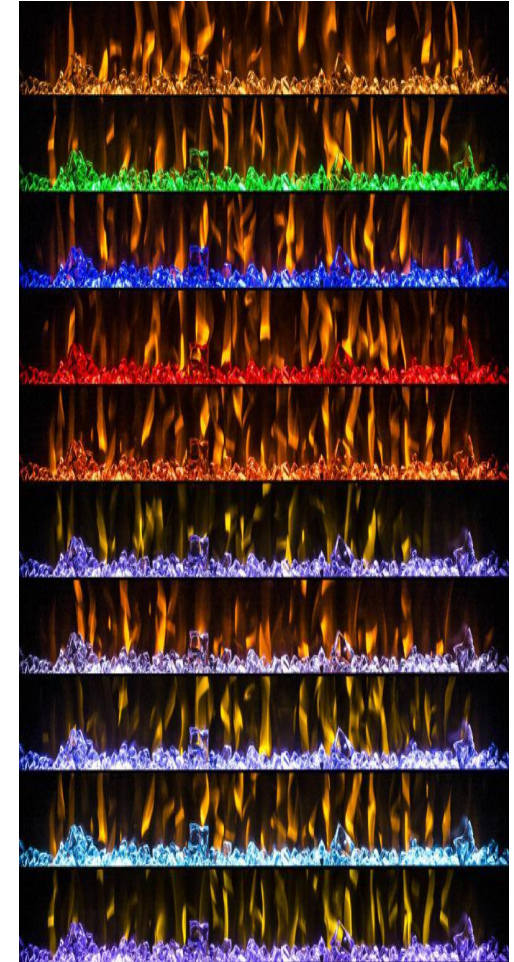

Heater



Timer



Remote  
control



Fan



LED  
light



Control  
panel

10 Colors LED ember Decorative Lights

# Product: BEF-60BIF04 PHOTO DISPLAY

Crystals Flame Effect




Logset Flame Effect



Pebbles Flame Effect



# Product: Touch Panel & Remote Control

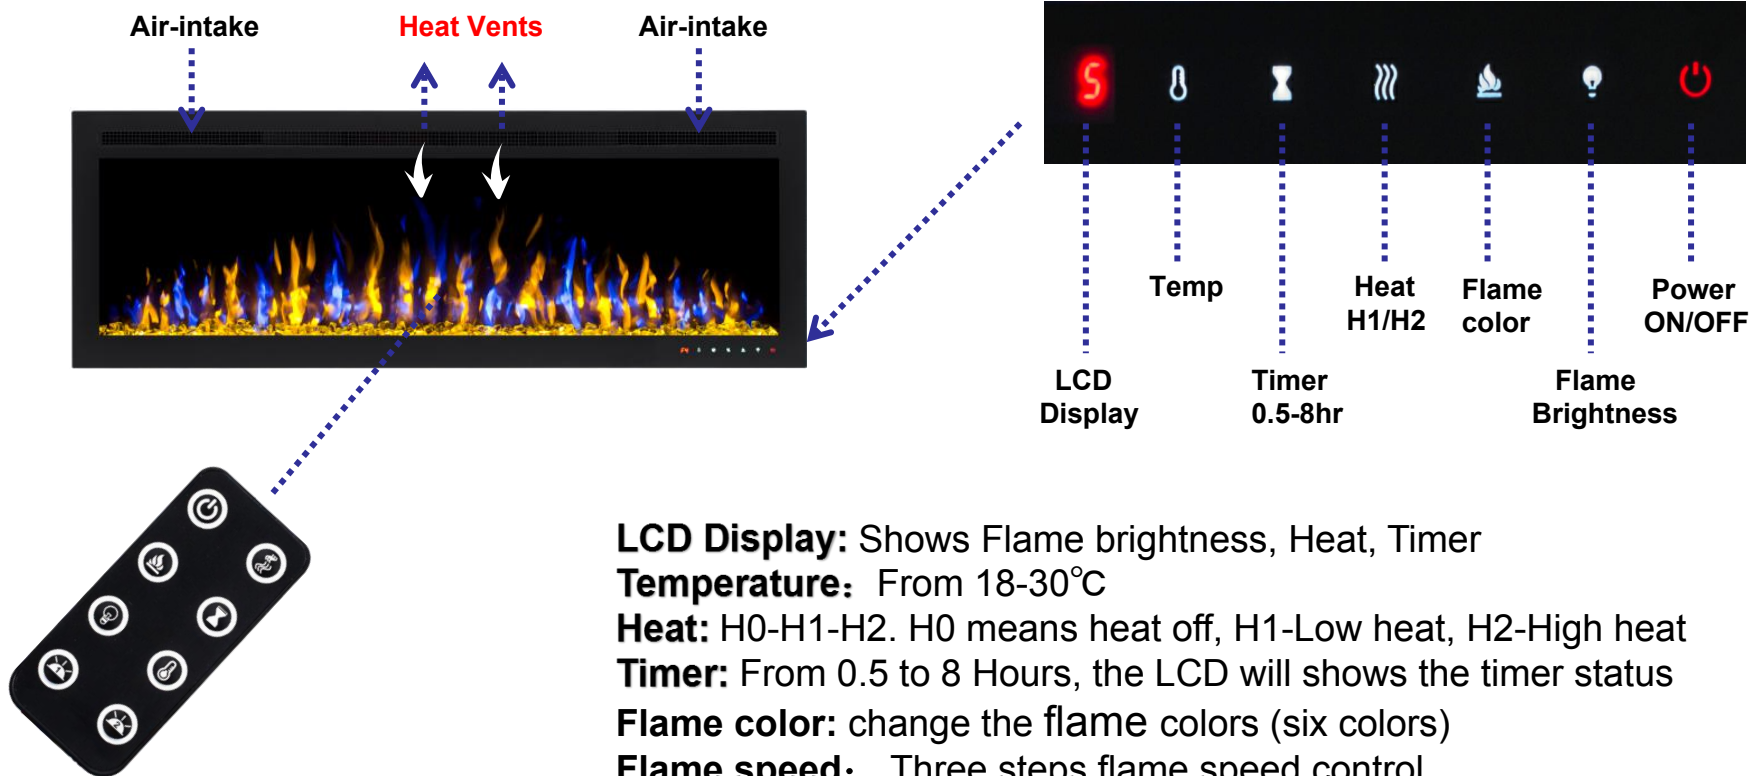

**LCD Display:** Shows Flame brightness, Heat, Timer

**Temperature:** From 18-30°C

**Heat:** H0-H1-H2. H0 means heat off, H1-Low heat, H2-High heat

**Timer:** From 0.5 to 8 Hours, the LCD will show the timer status

**Flame color:** change the flame colors (six colors)

**Flame speed:** Three steps flame speed control

**Ember bed :** Change the ember bed colors (10 colors)

**Flame Brightness:** from F5-F4-F3-F2-F1

**Power:** Turns On/Off

**Note:** The operation and functions of the two methods are the same.

# Product: Wall Mounted Installation



**Side view after installation**



**Front view after installation**

# Product: Wall Recessed Installation



**Before installation**



**After Installation**